

Specification sheet

XD 230

FA 4X2 Rigid, 19t



ENGINES

XD NewGen 230 PX-7 (167 kW / 227 hp)

XD NewGen 260 PX-7 (189 kW / 257 hp)

XD NewGen 290 PX-7 (212 kW / 287 hp)

GVM¹⁾

18200 kg

GCM²⁾

19000 kg

Max. front 6700 kg

Max. rear 11500 kg

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 2.; Cab suspension mechanical; LED head lights; No DAF Corner View.

Optional

07018 Sleeper Cab	01925 Two LED work lamps for cab rear wall
06244 Sleeper High Cab	01891 Hazard beacons on cab front, prepared
01226 Cab suspension air	06629 Two hazard beacon lights
03358 External sun visor	03232 Front windscreen with solar control foil
03922 Fog lights front	03317 Rear window: double glass
00936 Auxiliary LED lights on cab roof, prepared	07343 Kerb view window co-driver door
01836 LED Skylights	01362 DAF Digital Vision System
00949 LED Skylights; aux. LED lights on cab rf, prepared	

AERODYNAMICS

Optional

00008 Adj. roof air deflector short Sleeper High Cab	00097 Adj. roof air deflector for Sleeper Cab
02662 Adj. roof air defl. long mid XD Sleeper High Cab	00020 Adj. roof air deflector long low Sleeper High Cab
00082 Adj. roof air deflector for Day Cab	

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Storage compartment in centre; Automatic Temperature Control and aircro; No auxiliary cab heater.

Optional

02354 Steering wheel with silver accents	02117 Third seat
02355 Steering wheel, leather	02837 Dashboard table
02353 Cab interior decoration: Argenta	03948 Single drawer
02350 Cab interior decoration: Natura	03954 Refrigerator
07733 Driver seat: Luxury Air	02838 Foam mattress for lower bunk
07736 Driver seat: Super Air	02854 Xtra Comfort mattress for lower bunk
07737 Driver seat: Xtra Leather Air	01775 Xtra Comfort mattress with topper for lower bunk
01740 Arm rest at both sides of the driver seat	06970 Automatic Cab Climate Control

COMMUNICATION AND DRIVING MANAGEMENT

No PACCAR Connect; Tachograph mechanical; Speed limiter setting 85 km/h nominal; DAF Infotainment Luxury with Luxury speakers; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

Optional

09681 Preparation for Maut	01923 DAF Infotainment Luxury Plus; Exclusive speakers
01916 DAF Infotainment Luxury Plus with Luxury speakers	01915 DAF Infotainment System: Luxury Plus
01158 DAF Infotainment Luxury with Exclusive speakers	

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system; No EC-ADR packages; Drive-off Assist; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners
--

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 13.00 t; Rear: air suspension, SR1344; No lifting device.

Optional

04647 Front springs air

WHEELS AND TYRES

Driven rear axle(s): 295/60R22.5; Tyre pressure monitoring; F1,295/60R22.5GO FMAXS2 150/147 K Steering BCA; R1,295/60R22.5GO FMAXS2 150/147 K Steering BCA.

Optional

16152 Tyre makes and types

DRIVELINE

Engine PX-7, 6 cylinder diesel engine, 6.7 litres. Output 167 kW (227 hp) at 1900 rpm. Max. torque 890 Nm at 1000-1700 rpm.; Exhaust emission Euro 6; 8-speed PowerLine 8AP1000 overdrive, 4.89-0.64; Gearbox ratio 4.89-0.64; Rear axle ratio 5.57.

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Engine driven, water cooled aire compressor with automatic air heated dryer.

Optional

02861 PX Engine Brake

CHASSIS

Wheelbase 4.00 m / rear overhang 1.70 m; Side member height 260 mm; Standard component location; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 30 l, right-hand side chassis; Spray suppression.

Optional

02601 Side member height 310 mm	07071 Spare wheel carrier right-hand side
16157 Fuel tanks, material and sizes	03323 Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

Optional

08026 Trailer coupling Rockinger	04659 Trailer cable EBS D=13.0
---	---------------------------------------

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

09421 Additional spare wiring **08121** Tail lift application

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

24V POWER SUPPLY

Alternator 80 A, batteries 2x 140 Ah..

Optional

01897 Alternator 100 A **08797** Batteries 2x175Ah

GVM AND GCM

Chassis weight related technical GVM max 19000 kg; Driveline related max GCM 19000 kg.

APPLICATION CONDITIONS

Cyclonic air intake high.

Optional

02260 Extra cab insulation

SERVICE AND MAINTENANCE

Warranty: 2 years complete vehicle as supplied by the OEM (excl. real wear parts), 1st year breakdown recovery.; ITS service.

VEHICLE DELIVERY

Minimum toolkit.

Optional

07569 Lifting jack

OPTION PACKAGES

Optional


17595 Executive Pack XD/XF



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

XD 230

FA 4X2 Rigid, 19t

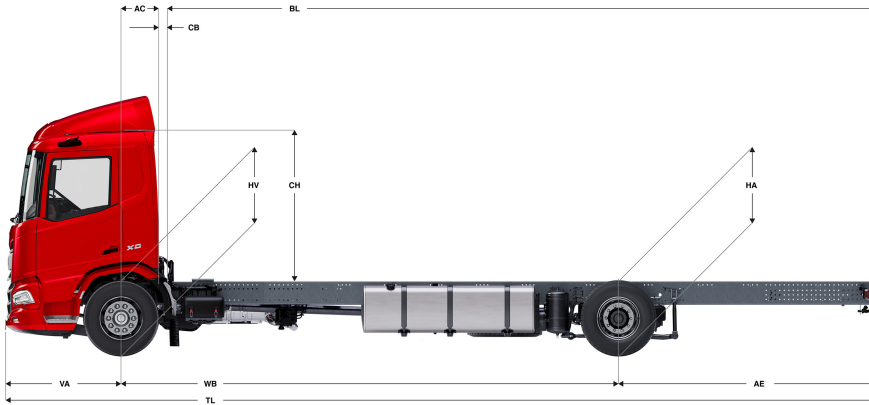

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
DAY CAB	4,00	1,70	3641	1708	5349	3059	9792	12851	0,50	0,25	2,06	4,71	4,71	7,23	0,93	0,90	14,01	15,40
	4,20	1,80	3642	1722	5364	3058	9778	12837	0,50	0,25	2,06	5,02	5,02	7,53	0,93	0,90	14,52	15,93
	4,50	1,95	3644	1759	5404	3056	9741	12796	0,50	0,25	2,06	5,48	5,48	7,98	0,93	0,90	15,30	16,72
	4,70	2,05	3646	1772	5418	3054	9728	12782	0,50	0,25	2,06	5,79	5,79	8,28	0,93	0,90	15,82	17,25
	4,90	2,35	3641	1800	5441	3059	9700	12759	0,50	0,25	2,06	6,09	6,09	8,78	0,93	0,90	16,34	17,78
	5,10	2,75	3697	1940	5637	3003	9560	12563	0,50	0,25	2,06	6,41	6,41	9,38	0,93	0,90	16,87	18,31
	5,40	2,65	3721	1947	5668	2979	9553	12532	0,50	0,25	2,06	6,88	6,88	9,58	0,93	0,90	17,65	19,10
	5,70	2,65	3733	1959	5692	2967	9541	12508	0,50	0,25	2,06	7,36	7,36	9,88	0,93	0,90	18,43	19,89
	6,10	1,15	3880	1914	5794	2820	9586	12406	0,50	0,25	2,06	8,09	8,09	8,78	0,93	0,91	19,48	20,95
6,60	1,15	3833	1876	5709	2867	9624	12491	0,50	0,25	2,01	8,86	8,86	9,28	0,98	0,96	20,79	22,27	
6,90	1,15	3841	1887	5728	2859	9613	12472	0,50	0,25	2,01	9,34	9,34	9,58	0,98	0,96	21,58	23,07	
SLEEPER CAB	4,00	1,70	3756	1709	5465	2944	9791	12735	0,83	0,25	2,06	4,11	4,11	7,23	0,93	0,90	14,01	15,40
	4,20	1,80	3757	1722	5479	2943	9778	12721	0,83	0,25	2,06	4,41	4,41	7,53	0,93	0,90	14,52	15,93
	4,50	1,95	3760	1760	5520	2940	9740	12680	0,83	0,25	2,06	4,88	4,88	7,98	0,93	0,90	15,30	16,72
	4,70	2,05	3761	1773	5534	2939	9727	12666	0,83	0,25	2,06	5,19	5,19	8,28	0,93	0,90	15,82	17,25
	4,90	2,35	3756	1801	5557	2944	9699	12643	0,83	0,25	2,06	5,50	5,50	8,78	0,93	0,90	16,34	17,78
	5,10	2,75	3812	1940	5753	2888	9560	12447	0,83	0,25	2,06	5,81	5,81	9,38	0,93	0,90	16,87	18,31
	5,40	2,65	3836	1948	5784	2864	9552	12416	0,83	0,25	2,06	6,31	6,31	9,58	0,93	0,90	17,65	19,10
	5,70	2,65	3849	1959	5808	2851	9541	12392	0,83	0,25	2,06	6,78	6,78	9,88	0,93	0,90	18,43	19,89
	6,10	1,15	3995	1914	5910	2705	9586	12291	0,83	0,25	2,06	7,52	7,52	8,78	0,93	0,91	19,48	20,95
6,60	1,15	3948	1876	5825	2752	9624	12375	0,83	0,25	2,01	8,29	8,29	9,28	0,98	0,96	20,79	22,27	
6,90	1,15	3957	1887	5844	2743	9613	12356	0,83	0,25	2,01	8,76	8,76	9,58	0,98	0,96	21,58	23,07	
SLEEPER HIGH CAB	4,00	1,70	3785	1709	5495	2915	9791	12705	0,83	0,25	2,54	4,12	4,12	7,23	0,93	0,90	14,01	15,40
	4,20	1,80	3786	1723	5509	2914	9777	12691	0,83	0,25	2,54	4,43	4,43	7,53	0,93	0,90	14,52	15,93
	4,50	1,95	3789	1761	5549	2911	9739	12651	0,83	0,25	2,54	4,89	4,89	7,98	0,93	0,90	15,30	16,72
	4,70	2,05	3790	1774	5564	2910	9726	12636	0,83	0,25	2,54	5,21	5,21	8,28	0,93	0,90	15,82	17,25
	4,90	2,35	3786	1801	5587	2914	9699	12613	0,83	0,25	2,54	5,51	5,51	8,78	0,93	0,90	16,34	17,78
	5,10	2,75	3842	1941	5783	2858	9559	12417	0,83	0,25	2,54	5,84	5,84	9,38	0,93	0,90	16,87	18,31
	5,40	2,65	3866	1948	5814	2834	9552	12386	0,83	0,25	2,54	6,32	6,32	9,58	0,93	0,90	17,65	19,10
	5,70	2,65	3878	1959	5837	2822	9541	12363	0,83	0,25	2,54	6,80	6,80	9,88	0,93	0,90	18,43	19,89
	6,10	1,15	4025	1915	5939	2675	9585	12261	0,83	0,25	2,54	7,55	7,55	8,78	0,93	0,91	19,48	20,95
6,60	1,15	3978	1877	5855	2722	9623	12345	0,83	0,25	2,49	8,31	8,31	9,28	0,98	0,96	20,79	22,27	
6,90	1,15	3986	1887	5874	2714	9613	12326	0,83	0,25	2,49	8,79	8,79	9,58	0,98	0,96	21,58	23,07	

OTHER DIMENSIONS VA: 1,53 HV¹³⁾: 0,96 HV¹⁴⁾: 0,89 RB: 0,79 SB: 1,82 TB¹⁵⁾: 2,46

- GVM in conformity with registration documents.
- GCM in conformity with registration documents.
- Axle load with standard tyre size.
- Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 75 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
- Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- CB is based on standard air intake and/or exhaust.
- Cab height is measured from frame member to closed cabin roof hatch.
- Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- Unladen height at centre of driven axle(s).
- Laden height at centre of driven axle(s).
- TK = turning circle between kerbs.
- TW = turning circle between walls.
- Unladen height at centre of front axle(s).
- Laden height at centre of front axle(s).
- TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.