


# Specification sheet

## CF 410

FAC 8X2 Rigid, double mounted trailing axle

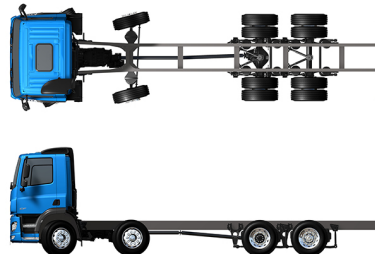

### ENGINES

- CF 370 MX-11 (270 kW / 367 hp)
- CF 410 MX-11 (300 kW / 408 hp)
- CF 450 MX-11 (330 kW / 449 hp)
- CF 430 MX-13 (315 kW / 428 hp)
- CF 480 MX-13 (355 kW / 483 hp)
- CF 530 MX-13 (390 kW / 530 hp)

### GVM<sup>1)</sup>

32000 kg

Max. front 16000 kg

Max. rear 16000 kg

### GCM<sup>2)</sup>

44000 kg

072F8799CEAA - 202501H - 18-09-2024

Kazakhstan, Bosfor Motors LLP, [www.bosformotors.kz](http://www.bosformotors.kz)

## CAB EXTERIOR

Day Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; LED daytime running lights; Manually adjustable main mirrors; No front view mirror.

### Optional

<b>02106</b> Sleeper Cab	<b>09983</b> Fog lights
<b>01137</b> Space Cab	<b>09984</b> Fog lights and cornering lights
<b>01226</b> Cab suspension air	<b>06593</b> Skylights
<b>01174</b> External sun visor green translucent	<b>06628</b> One hazard beacon light at co-driver side
<b>00847</b> Air horns, single set	<b>06627</b> One hazard beacon light at driver side
<b>09006</b> Air horns, double set	<b>06629</b> Two hazard beacon lights
<b>08020</b> LED head lights	

## AERODYNAMICS

### Optional

<b>06776</b> Adjustable roof air deflector	<b>04906</b> Side collars, one side hinged
--	--

## COLOURS

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey..

### Optional

<b>06485</b> Head lamp panel and bumper: cab colour	<b>09933</b> Head lamp panel and bumper: Stone Grey
---	---

## CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Black Rock; Driver seat: Comfort Air; Co-driver seat: basic; Automatic Temperature Control and airco; Pollen filter; Roof hatch glass, manual control.

### Optional

<b>09271</b> Steering wheel, leather, colour black	<b>00967</b> Seat belts red
<b>07733</b> Driver seat: Luxury Air	<b>02117</b> Third seat
<b>07736</b> Driver seat: Super Air	<b>06539</b> Refrigerator
<b>07737</b> Driver seat: Xtra Leather Air	<b>06783</b> Lower bunk foam mattress
<b>07741</b> Co-driver seat: Comfort Air	<b>06784</b> Lower bunk mattress Xtra Comfort
<b>07743</b> Co-driver seat: Luxury Air	<b>06676</b> PL light in cab ceiling
<b>07746</b> Co-driver seat: Super Air	<b>06970</b> Automatic Cab Climate Control
<b>07748</b> Co-driver seat: Xtra Leather Air	

## COMMUNICATION AND DRIVING MANAGEMENT

Tachograph digital, Stoneridge 1B; Speed limiter setting 85/90 km/h; Antennas: radio, 2x cellular, GNSS; Cruise control.

### Optional

<b>09681</b> Preparation for Maut	<b>08023</b> Adaptive Cruise Control with FCW and AEBS-3
<b>08450</b> Luxury speaker system with 6 speakers	<b>06991</b> Predictive Cruise Control
<b>07117</b> Radio/USB player, 2 speakers	<b>06992</b> Predictive Cruise Control lite

## SAFETY AND SECURITY

No Lane Departure Warning System; No vehicle stability control; Basic engine immobiliser system.

### Optional

<b>08631</b> Air bag (driver) and 2 seat belt tensioners	<b>09827</b> Side camera system
<b>09828</b> Front camera system	<b>01725</b> Reverse warning

## SUSPENSION AND AXLES

Front axles load 8.00 + 8.00 t; Rear: 12.00 + 7.80 t, air suspension, SR1347.

### Optional

<b>06264</b> Front axles load 9.00 + 9.00 t	<b>01800</b> Rear axle SR1344
<b>04057</b> Rear axle HR1356	<b>08191</b> Axle load monitoring

## WHEELS AND TYRES

Front axle(s): 315/70R22.5; Second front or leading axle: 315/70R22.5; Driven rear axle(s): 315/70R22.5; Second driven rear or trailing axle: 315/70R22.5; Disc wheels steel, silvergrey; No wheel protection rings.

### Optional

<b>16152</b> Tyre makes and types
-----------------------------------

## DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 300 kW (408 hp) at 1600 rpm. Maximum torque 2100 Nm at 900-1125 rpm.; Exhaust emission Euro 5; Engine idle shutdown, 5 minutes; Manual gearbox, 16 speeds; Gearbox ratio 13.80-0.84; Rear axle ratio 2.69.

### Optional

<b>03600</b> Exhaust emission Euro 6	<b>07103</b> Automated gearbox, TraXon, 16 speeds
<b>07102</b> Automated gearbox, TraXon, 12 speeds	

## BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode..

### Optional

<b>09921</b> MX Engine Brake	<b>02715</b> ZF Intarder
------------------------------	--------------------------

## CHASSIS

Wheelbase 5.70 m / rear overhang 2.00 m; Side member height 310 mm; Standard component location; Exhaust pipe vertical, high; Aluminium fuel tank 340 l RH, height 620 mm; Tank for AdBlue® 45 l, left-hand side chassis; Front underrun protection (FUP); Spray suppression.

### Optional

<b>06610</b> Exhaust pipe horizontal, low	<b>03323</b> Rear light with LEDs
<b>07070</b> Spare wheel carrier left-hand side	

## DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; No pneumatic trailer connection; No electric trailer connection.

### Optional

<b>07033</b> Trailer coupling Ringfeder D=13.7	<b>08027</b> Trailer coupling Rockinger D=20.0
<b>07034</b> Trailer coupling Ringfeder D=20.0	<b>04624</b> Closing member D-value = 0kN
<b>08026</b> Trailer coupling Rockinger D=13.0	<b>07032</b> D-value cross member D=20

## BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

### Optional

- 04331** Appl connector including air control prep    **06692** Application connector chassis
- 09050** Application connectors for bb remote control

## POWER TAKE-OFF (PTO)

### Optional

- 16148** PTO types and positions

## 24V POWER SUPPLY

Alternator 80 A, batteries 2x 175 Ah..

### Optional

- 06460** Alternator 120 A                      **07671** Batteries 2x210Ah AGM C-type
- 08775** Alternator 150 A                      **06440** Batteries 2x230Ah

## GVM AND GCM

Chassis weight related technical GVM max 35000 kg; Driveline related max GCM 44000 kg class 2.

### Optional

- 00200** Driveline related max GCM 38000 kg class 2                      **00939** Driveline related max GCM 56000 kg class 2
- 03682** Driveline related max GCM 50000 kg class 2

## APPLICATION CONDITIONS

Cyclonic air intake behind the cab.

## SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

### Optional


- 08310** Service interval standard



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

# CF 410

## FAC 8X2 Rigid, double mounted trailing axle

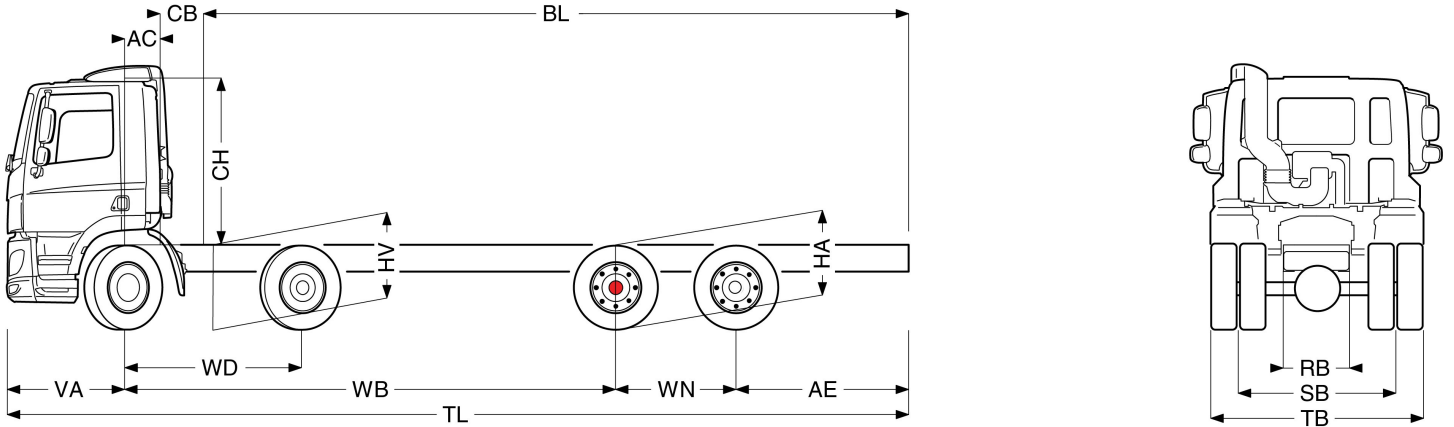

	Wheelbase - AE		Unladen weight <sup>9)</sup>			Gross Carrying Capacity			Variable dimensions									
	WB	AE <sup>5)</sup>	Front	Rear	Total	Front	Rear	Total	AC	CB <sup>8)</sup>	CH <sup>7)</sup>	BL <sup>9)</sup>	BL	TL	HA <sup>9)</sup>	HA <sup>10)</sup>	TK <sup>11)</sup>	TW <sup>12)</sup>
DAY CAB	5,00	1,75	6482	3199	9681	9518	12801	22319	0,39	0,28	1,94	6,36	6,63	9,52	1,02	0,98	19,85	21,14
	5,70	2,00	6429	3422	9851	9571	12578	22149	0,39	0,28	1,94	7,19	7,51	10,47	1,02	0,98	21,89	23,19
SLEEPER CAB	5,00	1,75	6552	3194	9746	9448	12806	22254	0,82	0,28	1,94	5,52	5,80	9,52	1,02	0,98	19,85	21,14
	5,70	2,00	6499	3418	9916	9501	12582	22084	0,82	0,28	1,94	6,36	6,66	10,47	1,02	0,98	21,89	23,19
SPACE CAB	5,00	1,75	6687	3169	9857	9313	12831	22143	0,82	0,28	2,62	5,56	5,83	9,52	1,02	0,98	19,85	21,14
	5,70	2,00	6631	3396	10027	9369	12604	21973	0,82	0,28	2,62	6,39	6,71	10,47	1,02	0,98	21,89	23,19

OTHER DIMENSIONS	VA: 1,37	WD: 2,05	WN: 1,40	HV <sup>13)</sup> : 1,07	HV <sup>14)</sup> : 1,00	RB: 0,79	SB: 1,82	TB <sup>15)</sup> : 2,48
------------------	----------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

- GVM in conformity with registration documents.
- GCM in conformity with registration documents.
- Axle load with standard tyre size.
- Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 80 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
- Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- CB is based on standard air intake and/or exhaust.
- Cab height is measured from frame member to closed cab roof hatch. With air intake on cab roof add: 0.14 m (for MX-11); add 0.21 m for MX-13.

- Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- Unladen height at centre of driven axle (trailing axle down).
- Laden height at centre of driven axle(s).
- TK = turning circle between kerbs.
- TW = turning circle between walls.
- Unladen height at centre of front axle(s).
- Laden height at centre of front axle(s).
- TB is overall width at rear. (At lower cab step 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.